

**PROFESSIONAL**  
**CLEANING SOLUTION**

**EZYTEK**  
CLEAN  
*Power of Cleaning*



**EZYTEK**  
CLEAN  
*Power of Cleaning*

**EZYTEK**  
CLEAN  
*Power of Cleaning*



**EZYTEK**  
CLEAN  
*Power of Cleaning*

**CAR WASH**

**EZYTEK**  
CLEAN  
*Power of Cleaning*





## “EZYTEK CLEAN DELIVER CONCEPT OF CLEANING IN DIFFERENT SEGMENT”

### || ABOUT US ||

Ezytek Clean is an ISO Certified Company founded in 2012, with a vision to enhance the power of cleaning, Ezytek clean provides a complete cleaning solution in a professional way. Company provides a complete cleaning solution with advanced equipments to change the way of cleaning Our young energetic team with experience in different aspects of the business support helps to carry forward the vision of this organization. Success for our clients is our company priority that is why we guide them through the whole buying process and ensure excellent experience. We are named among the leading exporters and manufacturers developing eco-freindly & trouble-free high pressure pump, Automobile Cleaning Equipments etc.

Based in Greater Noida, Uttar Pradesh, Ezytek Clean Pvt. Ltd. Is bringing advanced car wash solutions at the best market price. We are known for offering optimum quality solutions within the promised time line. Our company operates on the core ethics of integrity, client focus and innovation. With assistance of our skilled and highly qualified workforce, we are able to design equipments as per the exact needs of the buyers. Our products have user friendly design, long functional life as well as are economical than most of the same category products available in the market.








## OUR PRINCIPALS



## BUSINESS MODEL

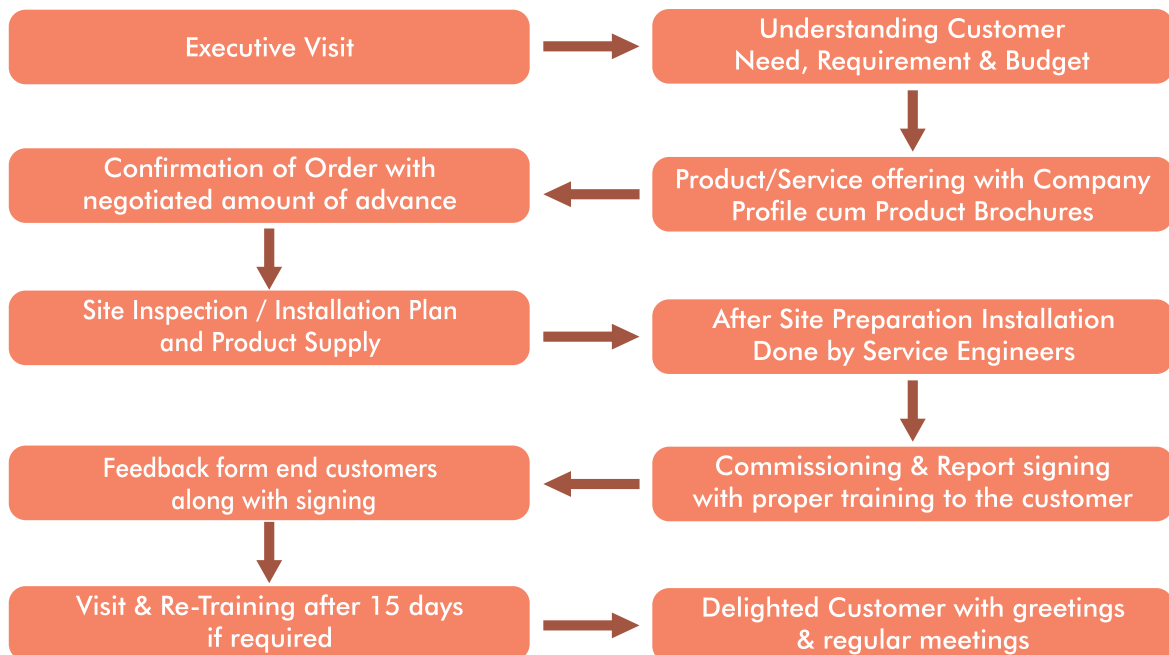




## High Pressure Car Washer Pumps

Three piston ceramic plunger pumps for cleaning units & industrial system. Ezytek clean supplies high quality high pressure pumps along with advanced cleaning equipments and environmental friendly chemicals.

Motor Power	3HP	5HP	7.5HP	10HP	15HP	20HP
Phase	Single	Three	Three	Three	Three	Three
Voltage	230V/415V	415V	415V	415V	415V	415V
Output (l/min)	12Ltr.	12Ltr.	15Ltr.	15/20Ltr.	20Ltr.	21Ltr.
Pressure (bar)	140	170	200	250/200	300	350
RPM	1450	1450	1450	1450	1450	1450
Actual Weight (kg)	40	45	70	90	90	190
Starter	DOL	DOL	DOL	DOL	Delta	Delta
Body Cover	SS/MS	SS/MS	SS/MS	SS/MS	SS/MS	SS/MS
Stand Type	Trolley/Wall	Trolley/Wall	Trolley/Wall	Trolley	Trolley	Trolley

- Solid ceramic plungers.
- Stainless steel check valves.
- Heat Treated crank shafts.
- High strength bronze or aluminum alloy connecting rods.
- Increased work efficiency and maximized the work output.
- Heavy duty forged brass manifolds



Wall Hanging High Pressure Washer




Trolley Based High Pressure Washer



Heavy Duty High Pressure

## High Pressure Accessories



360° Wash Boom



Lance holder



Lance



Foam/Wax Bottle Holder



Foam Gun with Quick Connect



Foam Lance



Hose Pipe



Accessories Tray Holder







## Vacuum Cleaner



The multi-purpose range of vacuum cleaners are ideal for interiors of the car workshop, garages and outside areas. An intelligent machine design that is energy efficient and optimized for maximum performance in all the applications.

SPECIFICATIONS	VC-15WD	VC-30WD	VC-70WD	VC-80WD
Function	Dry & Wet	Dry & Wet	Dry & Wet	Dry & Wet
Capacity	15L	36L	70L	80L
Vacuum suction	180m bar	230m bar	250m bar	280m bar
Air flow rate	42L/s	53L/s	106L/s	106L/s
Rated voltage	220V	220-240V	220-240V	220-240V
Tank diameter	345mm	345mm	440mm	440mm
Hose diameter	36mm	38mm	40mm	40mm
Packing size (cm3)	43*43*81	63*56*99	63*56*108	63*56*108

## Upholstery Cleaners



ET-27UC

TECHNICAL DATA	ET-27UC
No. of Motor	1
Maximum (Watt)	1200
Supply (Volt/Hz)	220-250
Suction (mm H <sub>2</sub> O)	210
Air flow (m <sup>3</sup> /hr)	48
Container Tank (Ltr)	27
Detergent Tank (Ltr)	0.8
Pump	2(Bar)
Weight (Kg)	15



ET-30UC

TECHNICAL FEATURES	ET-30UC	ET-40UC
No. of Motor	1	1
Stage	Double	Double
Voltage (V)	220-240	220-240
Frequency (Hz)	50/60	50/60
Cooling	by pass	by pass
Power max (W)	1400	1400
Power (W)	1200	1200
Water lift (mm H <sub>2</sub> O)	2400	2400
Air flow (m <sup>3</sup> h)	230	230
LPA sonorus 3mt [dB(A)]	60	60
Total tank capacity (ltr)	30	40
Capacity pump (HP)	0.8	0.8
Pump (bar)	2	2
Pump (W)	48	48
Detergent Tank (ltr)	10	10
Weight (Kg)	18	20



ET-40UC



## Robotic Underbody & Hand Gun Boom System

The system is provided with robotic undercarriage wash with nine oscillating nozzles on a moving gantry covering every corner of the undercarriage from front to back, complete system is provided with relay logic control and sensors for locating the vehicle and also selecting the vehicle length with easy operating remote panel.



High Pressure Triple Ceramic Plunger Pump	20/42 Ltr./min
Nozzle Pressure	200bar
Power	7.5HP/10HP
Time Required For Underbody Wash	1.5 min p/vehicle
Washing Length	6mtr
Total No Of Nozzles	3/9Nozzles
Nozzle Types	Nozles with oscillating system
Automation Type	fully automatic panel
Water Proof Standard Switch	IP65
Gantry Type	Robotic



Robotic Underbody

### Rotating Underbody

- It is substitute of robotic Underbody for easy cleaning the underside of vehicles. It can be used to clean cars, trucks, and many more. Easy to operate Energy efficient design Sturdy construction low maintenance and high performance.



Rotating Underbody Lance

### Manual underbody

- A right angle wash that helps clean difficult-to-reach areas Easily removes mud and debris from underbody wash without lift Made with high grade stainless steel for long life Task is done is less than 3 mins.



L Shape Underbody Lance



4 Nozzle Underbody








## Touchless Jet Car Wash With Dryer | Ezytek Tracer

EZYTEK TRACER combines the action of three variable frequency drives to control the speed of linear motion, lateral movement, and spin. All of these controls, managed by advanced software, result in a highly effective and rapid touchless wash. This unique configuration means that the wash bay area is completely free of obstacles, and thus any type of vehicle can access it with ease and be washed by the user in complete safety. EZYTEK TRACER combines the action of three variable frequency drives to control the speed of linear motion, lateral movement, and spin. All of these controls, managed by advanced software, result in a highly effective and rapid touchless wash, which also achieves significant savings when compared to other touchless systems. EZYTEK TRACER is flexible, too, offering a choice of options including various chemical sprays, waxes, foams, on-board drying, etc...

TECHNICAL-SPECIFICATION	
High Pressure Triple Ceramic Plunger Pump	42 Ltr/min
Nozzle Pressure	150bar
Power Requirement	15-kw
Water Consumption per Vehicle	100 to 120 ltr
Washing Time Required	8 to 9 mints
Wheel Wash	Yes
Chemical Wash	Automatic
Dryer	Yes
Automation	PLC with HMI Control System
Under Washing	9 Oscillating Nozzle
Machine Structure	Hot Dip Galvanized & Powder Coating
Dimension LxWxH	6.8x2.2x2.6 mtr





## Automatic Touchless Jet Car Wash

Ezytek Jet Wash uses the principle of high pressure water jets to displace dirt, grease and other foreign particles that get attached to the surface of the vehicle. Water droplets are compressed under pressure and ejected from a fine nozzle, giving it a very high kinetic energy. This kinetic energy when applied to the particle of dirt dislodges it from the surface and lets it flow down with the detergent. The result is a shining vehicle within no time at all.

### Main Features

- Compact design
- Long working Life
- Optimum operational efficiency

### Advantage

- Low water consumption
- Less time per vehicle • Very easy to operate
- Cost effective

### Car Wash Works on five stage

- Stage 1 Robotic Under Body Wash
- Stage 2 Pre Jet Wash
- Stage 3 Foam Spray & Wheel Wash
- Stage 4 Wax Spray
- Stage 5 Final Jet Wash








**TECHNICAL-SPECIFICATION**

High Pressure Triple Ceramic Plunger Pump	40 l/min
Nozzle Pressure	150bar
Power Requirement	11-12-kw
Water Consumption per Vehicle	120 to 140 ltr
Washing Time Required	6 to 8 mints
Wheel Wash	Yes
Chemical Wash	Automatic
Automation	PLC with HMI Control System
Under Washing	9 Oscillating Nozzle
Machine Structure	Hot Dip Galvanized & Powder Coating
Dimension LxWxH	6.0x2.2x2.6 mtr





## Fully Automatic Brush Car Washer | EZY-ZX Rollover

TECHNICAL-SPECIFICATION	
Machine Structure	Hot Dip Galvanized powder coating
Number of Brushes	3
Vertical Brushes	2
Horizontal Brushes	1
Brushes Pressure Sensing	Yes
Dryer	Automatic Profile Dryer
Power Required	18kw
Electrical Supply	415 V 50 Hz 3Phase natural with earthing
Wheel Brush	Yes
Control Programming	PLC programming
Control System	HMI pannel touch screen display
Washing Time Required	9 to 10 mints
Underbody Wash	9 Oscillating Nozzle
Pump Power	10hp
Power Consumption	2 Unit p/vehicle
High Pressure	40 I/M Triple Ceramic Plunger Pump
Profile Nozzle Pressure	150 bar
Dimension LxWxH	10x4x4 mtr



Fully Automatic Car Wash



Fully Automatic Wheel Wash



Profile High Pressure



**India's First Profile High Pressure Fully Automatic Car Washer**





## AUTOMATIC BRUSH CAR WASHER

### Product Description

The EZY-ZX rollover designed by Ezytek will exceed all your expectations. The elegant modular design of this new series sets a new trend while meeting all your automatic vehicle wash needs.

The new generation of rollovers stands out in so many ways: looks, mechanics, flexibility, and versatility. It has been created to satisfy the needs of the most demanding professionals in the wash world. What's more, this new series has a special quality which makes it different to anything the market has ever known before: its adaptability. The interior immediately appeals with its stylish modern design, which combines the latest technology and maximum reliability in the wash.

#### Main Features

- Compact design
- Long working Life
- Optimum operational efficiency

#### Advantage

- Low water consumption
- Less time per vehicle
- Very easy to operate
- Cost effective

#### Car Wash Works on Six stage

- Stage 1 Robotic Under Body Wash
- Stage 2 Pre Jet Wash
- Stage 3 Foam Spray & Wheel Wash
- Stage 4 Brush Wash
- Stage 5 Wax Spray
- Stage 6 Profile Dryer

Car wash efficiency is more than a concept. It is the result of bringing together quality, technology and performance into a single design.

### FLEXIBILITY

#### Configuration of programs

The flexible programming of the Ezytek Fully Automatic facilitates adaptation to Individual user needs. Different wash programs can be configured, speeds can be parametrised, chemical products can be dosed.

### PERFORMANCE

#### Ezytek Fully Automatic High Pressures Brush Wash

A number of high pressure pre-wash options with a common goal: removing stubborn dirt from the vehicle body.

### VERSATILITY

#### Available in different heights

Solid and compact structure available in four different wash heights

### TECHNOLOGY

#### Controller

PLC with standardized modules and a flexible configuration for optional extras. The use off the profibus communication protocol enhances communication and reduces machine wiring and connections.

#### Command post

Allows all of the machine's external elements to be connected. Two viewer options: standard and color touch screen.

### MECHANISM



#### Brush tilt

Accurate wash control thanks to 10° tilt of side brushes.





## Automatic Bike Wash

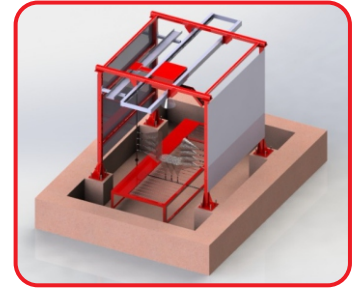

Model No	EZY-ABW 20
Type	Automatic
Automation Grade	PLC Control
Water Consumption	70 Litres/Bike
Material	Hotdip Galvanized with Powder Coated
Air Pressure	9 bar
Phase	3 Phase
Voltage	420v
Electricity Req.	6 Kw
Electricity Consumption	1.5 unit/bike
Motor Power	7.5 HP
Water Pressure	150 bar
Pump	Triplex plunger pump
Type Of Vehicle	Two Wheeler
No of washing Cycle	3
Washing Capacity	70 bikes/day
Pre-Wash	Yes
Foam Wash	Yes
Area Req.	10w* 10H*10L in feet approx.
Dryer	Optional





## E-vehicle Movable Car Spa

E-vehicle Movable Car Spa is a special customized futuristic e-vehicle having a large numbers of features for doorstep car washing, Cleaning and dry cleaning. it is very compact and powerful to deliver non-stop car washing & cleaning services at customers' doorstep.



### MACHINES :

- DIESEL STEAM BOOSTER
- MINI HIGH PRESSURE WASHER
- SINGLE MOTOR VACUUM CLEANER
- UPHOLSTERY CLEANER 40 LTR
- 4 NOZZLE UNDER BODY LANCE
- CAR POLISHER
- GENERATOR 3 TO 5 KW
- E-VEHICLE

### INBUILT CCTV CAMERA:

There is a point of CCTV camera to install Mi 360 WiFi camera to monitor remotely via mobile application. You have to download from the play store and synchronize it with the camera so that you can monitor remotely through the mobile application.



### SUPPORTING ITEM

- LITHIUM BATTERY
- SPRAY BOTTLES
- RUBBING PAD
- POLISH PAD
- MICRO FIBER CLOTHES
- WASH MITT
- GLASS MICRO FIBER CLOTHES
- EXTENSION BOARD WITH 20 METER CABLE
- CAMERA 2 PIS
- ACCESSORIES TRAY
- HANGER
- STEAM WAX 10 LTR
- FOAM 10 LTR
- RUBBING COMPOUND
- TEFLON COATING
- CREAM WAX
- UPHOLSTERY CHEMICAL 10 LTR
- MULTI POLISH 10 LTR
- FRESHNER
- STEAM GLOVES

" E-vehicle Movable Car Spa Greatest Business Opportunity to Serve car cleaning services at door Step" .





## Electric Steamer

The ideal place to start for those who are new to steam cleaning with all of the essential functions and convenience



TECHNICAL SPECIFICATION	ET-9SW	ET-12SW
Steam Temperature	160°C	230°C
Water Tank	10 Ltr.	10 Ltr.
Steam Pressure	7 bar	10 bar
Power	9 kW	12 kW
Voltage	220/415V	220/415V
Weight	70kg	70kg
Pre heating Time	7-8 Minutes	7-8 Minutes
Material	Stainless Steel/Powder Coated	Stainless Steel/Powder Coated

## Compact Steam Cleaner



TECHNICAL SPECIFICATION	ET-2SW
Steam Temperature	148 Deg C0
Water Tank	2.2 Ltr.
Steam Pressure	4 bar
Power	2000 watt
Voltage	230v
Weight	8.4kg
Pre heating Time	10 Mint
Material	ABS
Size	48x33x34cm





## Steam Booster

Car Wash using just bit of water Environmental friendly system, Wash & Wax Steam Booster systems produce nothing but steam meaning firstly that less water is used, the steam Booster system can clean a car using approximately 10litres of water, whereas a conventional power washing system uses closer to 100 liters of water per vehicle. The Steam Booster system allows every area of the vehicle be cleaned to a biological and forensic standard without leaving behind any waste water, foam or chemicals and meaning no disposal facilities or equipment are required

**Safety Features:-** Service Pressure Switch, Service thermostat, Safety Thermostat & Pressure Release Value.

TECHNICAL SPECIFICATION	ET-26SW
Hose Length	10 Meters
Water Tank Capacity	26 Liters
Wax Tank Capacity	10 Liters
Diesel Fuel Capacity	10 Liters
Voltage Frequency	230v/50Hz
Electric Power Consumption	200W
Steam Generator	Diesel fires coil technology
Operating Temperature	80~90 C(170~203°F)
Preheating Time	Below 1 Minute
Water Consumption	600~1200cc/min(users can adjust)
Materials	Stainless Steel/Ms Powder Coating
Automatic Wax Mixing Device	(on/off function with time control)
Weight	120 kg
Dimension LxWxH	38x25x33 Cm



**Steam Booster Car Washer**



TECHNICAL SPECIFICATION	ET-15SW
Hose Length	10 Meters
Water Tank Capacity	15 Liters
Wax Tank Capacity	10 Liters
Diesel Fuel Capacity	10 Liters
Voltage Frequency	230v/50Hz
Electric Power Consumption	200W
Steam Generator	Diesel fires coil technology
Operating Temperature	100~150 C(170~203°F)
Preheating Time	Below 1 Minute
Water Consumption	600~1200cc/min(users can adjust)
Materials	HDPE Body
Automatic Wax Mixing Device	(on/off function with time control)
Weight	85 kg
Dimension LxWxH	85/60/85 Cm



Steam Gun



Steam Hose



Hot Wax



Steam Gloves



## Hot and Cold High Pressure Equipment

This Commercial High Pressure Hot Water cleaner is ideal to use in Automobile, Hospitality, Engineering Industry etc to De-Grease only surfaces and stubborn scales. The use of the hot water combined with high pressure successfully removes the most toughest of dirt and muck. Extremely efficient for washing of any vehicles (trucks, buses, automobiles, house vans, motorcycles, trains) mechanical parts, oil and wine silos, any industrial floor, parking areas, roofs, external walls etc.

TECHNICAL SPECIFICATION	EC-5HP	EC-7.5HP
Operating Pressure	170 bar	200 bar
Flow Rate	13L/Min	15L/Min
Inlet Water Temp	0 to 150 Celsius	0 to 150 Celsius
Electric Motor	5HP	7.5HP
Power	415V	415V
Weight	110 Kg	150 Kg
Standard Accessories	10 mtr. Hose/Gun/ Insulated Gun with Lance	10 mtr. Hose/Gun/ Insulated Gun with Lance

### Hot and Cold High Pressure



Hot & Cold machine manufacturing & customized as per required SPECIFICATION.

## Plunger Pumps Water Jet Cleaning Machine

TECHNICAL SPECIFICATION	
Brand	Ezytek
Power	25-40 HP
Water Flow	15-25 Lpm
Speed Rpm	1450
Phase	3 Phase
Bar	350-500
Voltage	420V
Stater	Star Delta
Base	Trolley Mount



High pressure jetting machine manufacturing & customized as per required SPECIFICATION.

Which is used to remove mold, grime, dust, mud and dirt from of various objects such as buildings, concrete road surfaces and many more industrial applications.







## Scissor Lift

- Hydraulic System Synchronize the movement of runways.
- Integrated limit switch controls Is high & low lift positions.
- Easy to use and maintain control panel features push button controls.

TECHNICAL SPECIFICATION	ET-4SL
Capacity	4 Ton
Max. Lifting Height	6 Feet
Size	9'L X 3.6'W X 4"H
Motor Power	3HP
Voltage	220/415 V
Lower Height	4 Inch
Weight	450kg
Safety	Mechanical Lock
Surface Finish	Hot Dip Galvanize / Powder Coating
Body Material	Mild Steel
Lifting Time	40 Sec.
Oil Tank Capacity	10 Ltr.
Oil Grade	Hydraulic 68



**Scissor Lift manufacturing & customized as per required SPECIFICATION.**

## Two Post Lift

Technical Specifications	TPL-1100BP
Lifting capacity	4 Ton
Overall height	2844 mm
Bay width	3419 mm
Inside Column Size	2799 mm
Load distribution (front: Rear)	2:3
Lifting time	<45 seconds
Drive through clearance	2579 mm
Maximum lifting height	1800mm
Minimum height	110 mm
Lifting arm adjustments	Front      Rear
Minimum length	712 mm    992 mm
Maximum length	1051 mm   1462 mm
Power supply	1 Phase/3Phase, 50 Hz
Power	3.0 HP






## 3D Wheel Alignment

### 3D WHEEL ALIGNMENT (EZY - X70)

- Windows operating system, Latest Ezytek Software, include all functions from old software, with self-owned intellectual property.
- With black-box functions, all files can be saved for future analysis.
- Estimation Angle: Toe, Camber, Caster, S.A.I, push edge, Setback edge, Max turning point, Wheel base, Wheel moving radius.
- Quicker running for alignment with guiding menu, can read database within 3 minutes.
- 3D animated measurement, easy for training and operate.
- Manual enter height of vehicle.
- "MKS" measurement special for Benz.
- Measurement for Caster Trail.
- Measurement for Scrub Radius & S.A.I
- Available for OEM vehicle database.
- Zero Toe adjustment for camber.
- Single Tie Rod Adjust.
- Voice brief for push-pull vehicle.
- Drag Link Adjust to ensure the steering wheel in the middle.

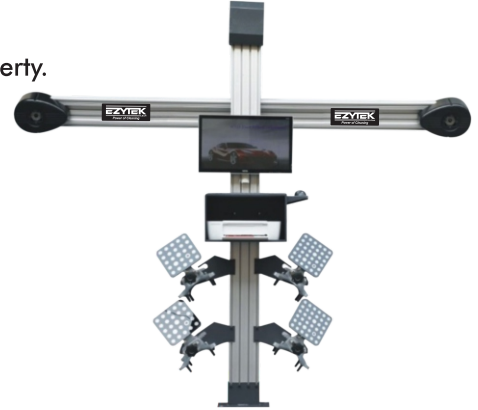

Features :
Simple & User Friendly Software
With HD Cameras (2 Nos.)
High Accuracy
Easy to Operate
With Complete Accessories

### 3D WHEEL ALIGNMENT (EZY - X60)

#### Main Features

- Windows OS, operation system can be easily guided by "Next walk" heding.
  - Outperform 20,000 database around the world and with a lifetime update organization.
  - Repeat estimation exactness is  $\pm 0.03$  which be a world's driving level.
  - Estimation Angle: Toe, Camber, Caster, S.A.I, push edge, Setback edge
- One time RCP calibration is enough after the completion of equipment installation, easy operation, need no regular repeat this work



MEASUREMENT PROJECT	Accuracy	Measurement project
Display accuracy	0.01°	$\pm 10^\circ$
Camber	$\pm 0.02^\circ$	$\pm 20^\circ$
Caster	$\pm 0.06^\circ$	$\pm 20^\circ$
Kingpin Inclination	$\pm 0.06^\circ$	$\pm 20^\circ$
Toe-in & Toe-out	$\pm 0.02^\circ$	$\pm 5^\circ$
Set back	$\pm 0.02^\circ$	$\pm 5^\circ$
Thrust angle	$\pm 0.02^\circ$	
Wheel Deviation	$\pm 0.08''$	
Axis Deviation	$\pm 0.08''$	





## Wheel Balancer

### VIDEOGRAPHIC WHEEL BALANCER (EZY - W40)

#### Main Features

- Accuracy 5gm, 1gm in fine mode
- Three Alloy Rim Programs
- One Steel Rim Program
- Malfunction Detect Program
- Self-Calibration Program
- Membrane Keyboard
- Automatic Brakes

#### Technical Specifications

Model No.	(EZY - W40)
Power Supply	220V
Measuring Time	8 s
Motor Power	0.25 kw
Max. Wheel Weight Capacity	65 kg
Balancing Speed	200 RPM
Motor	0.25 KW
Rim Diameter	10"-24"
Rim Width	1.5"-20"
Noise Level in Working Condition	< 70db



### VIDEOGRAPHIC WHEEL BALANCER (EZY - W50)

#### Main Features

- Self Calibration and diagnosis.
- 17" Led Monitor with exclusive 3D animated video graphics for precise calibrations.
- High precision main shaft with strict heat treatment process to ensure accurate repeat measuring with automatic data function.
- Highly stable and accurate computer chip with self Calibration and Self diagnostic functions.
- 9 Balancing modes and opt function can measure rim from 10"-24".
- Equipped with protection Hood, pliers, full set of cones and calipers.
- Split and weight counseling function.

#### Technical Specifications

Model No.	(EZY - W50)
Power Supply	220V
Rim Size	10-24"
Measuring Time	8 s
Motor Power	0.25 KW / 0.37 KW
Rim Width	1.5" - 20"
Max. Wheel Weight	65 Kg
Balancing speed	200rpm
Balancing accuracy	± 1gm
Noise Level in Working Condiion	<70 db







## Tyre Changer

### **TYRE CHANGER (EZY - TC40 )**

#### **Main Features**

Movable vertical shaft fix for different size wheels to correct position easily and quickly and also not damage the tyre bead. The max wheel size for this model could upto 30" and also suitable for car, van The standard accessory includes the Inflation device and bead blaster.

#### **Technical Specifications**

<b>Model No.</b>	<b>EZY - TC40</b>
Working Pressure	8 - 12 Bar
Bead Breaker Power Per Cylinder	2800 kg
Net Weight	190 kg
Self-Centering Rotation Speed	7 RPM
Max. Wheel Diameter	38"
Max. Wheel Width	3" - 12"
Clamping	10" - 20"
Motor Power	0.75 KW <sub>w</sub>



### **TYRE CHANGER (EZY - TC50 )**

#### **Technical Specifications**

<b>Model No.</b>	<b>EZY - TC50</b>
Working Pressure	8 - 12 Bar
Bead Breaker Power Per Cylinder	2800 kg
Net Weight	350 kg
Rotation Speed	6 - 12 RPM
Max. Wheel Diameter	42"
Max. Wheel Width	15"
Outside Chuck Size	10" - 24"
Motor Power	0.75 KW
Power Supply	220 V





## Nitrogen Tyre Inflator



### Main Features

- Fastest N2 Generator
- Maximum Purity With Inbuilt Tank
- Large & Bright Display
- Suitable for Car, SUVs & LCVs

### Technical Specifications

Model No.	EZY-N2
Recomm. Input Pressure	8-12 kg/cm <sup>2</sup>
Purity of Nitrogen	95-99%
Storage Tank Size	70 Ltrs
N2 Generating Capacity	2000-4000 lph
Compressed Air Pressure Required	<12 Bar
Nitrogen Output	66L/min@8-12 Bar
Weight	170 Kg
Power Supply	230V/50 Hz
Vehicle Application	Bus, Truck, HCV
Power	200-400W

## Air Compressor (3HP)



### AIR COMPRESSOR

#### Product Description

Ezytek offering best quality, More efficient and reliable Air Compressor.

#### Main Features

Double stage air compressor  
Highly efficient with durable metal Sheet.

### Technical Specifications

Model No.	TF-300	TF-500	TF-7500
Power (HP)	3	5	7.5
Compressor (RPM)	975	710	975
Tank capacity (ltrs.)	160 & 200	250	250
Working pressure (kg/cm <sup>2</sup> )	12	12	12
Free Air delivery (LPM)	263	390	536
No. of cylinders	2	2	2
Power supply	220V AC, 1 Phase or 380-415V AC, 3 Phase, 50Hz		



## Manual Sweeper

TECHNICAL SPECIFICATION	EC-512MS
Operation	Manual
Working Capacity	2800sq mtr/hr
Tank capacity	45 ltr
Body material	ms/A.bs
Weight	25 kg



## Sweepers Walk Behind

TECHNICAL DATA	EC-512 BT	EC-512 P
Filter Surface	1	1
Maximum Speed (Km/Hr)	3.5	3.5
Supply	Battery 12V	Petrol Honda 4HP
Productivity (M2/H)	2450	2450
Max Working Width	700	700
Main Brush Width	500	500
Dirt Container Tank (Ltr)	50	50
Weight (Kg)	78	111



TECHNICAL DATA	EC-712 BT	EC-712 P
Filter Surface	3	3
Maximum Speed (Km/Hr)	3.5	3.5
Supply	Battery 24V	Petrol Honda 4HP
Productivity (M2/H)	3150	3150
Max Working Width	900	900
Main Brush Width	700	700
Dirt Container Tank (Ltr)	65	65
Weight (Kg)	93	126







## Sweeper Rider-On



TECHNICAL DATA	EC-1050 BT
Filter Surface	4
Maximum Speed (Km/Hr)	6
Supply	Battery 24V
Productivity (M2/H)	6300
Max Working Width	1050
Main Brush Width	650
Dirt Container Tank (Ltr)	70
Weight (Kg)	173

TECHNICAL DATA	EC-1280 BT	EC-1280P	EC-1280B
Filter Surface	4	3.5	4
Maximum Speed (Km/Hr)	6.2	6.2	6.2
Supply	Battery 24V(4X6V)	Petrol Honda 5.5HP	Battery 24V (4x6V)
Productivity (M2/H)	7700	7700	7700
Max Working Width	1200	1200	1200
Main Brush Width	700	700	700
Dirt Container Tank (Ltr)	75	75	80
Weight (Kg)	244	309	244



TECHNICAL DATA	EC-1250B	EC-1250D
Filter Surface	4	4
Maximum Speed (Km/Hr)	6.2	6.2
Supply	Petrol Honda 5.5HP	Diesel Yanmar 4.6HP
Productivity (M2/H)	7700	7700
Max Working Width	1200	1200
Main Brush Width	700	700
Dirt Container Tank (Ltr)	80	80
Weight (Kg)	309	318



## Single Disk Scrubber

We are well reckoned manufacturers and suppliers of high quality single disc machine for floor cleaning, an exclusive high quality cleaning machine for scrubbing, cleaning, buffing and polishing of all type of floors. We offer single disc machine in 17 inch and 13 inch dia. This machine is manufactured with high precision deploying best technology and high grade spares. Our single disc scrubber machine is available at the most economical prices.

TECHNICAL SPECIFICATION	ET-8SD
Power Supply (volts)	220 V
Scrubbing Squeegee with (mm/m)	432
Working Capacity (m2/h)	220
Detergent Tank Cap. (lit)	8 L
Weight	48kg
RPM (rpm)	154
Brush Power (Watts)	1200/1500 W
Dimensions LxBxH/ weight (cm/kg)	40 x 12 x 115



## Scrubber Driers Walk Behind



TECHNICAL DATA	EC-15B	EC-15E
No. of Brush	1 (disc)	1 (disc)
Maximum Speed (Km/Hr)	3.5	3.5
Supply (Volt/Hz)	220-240V (50Hz)	24V (2x12V)
Suction Width (mm)	450	450
Productivity (M2/H)	1300	1300
Scrubbing Width (mm)	350	350
Container Tank (Ltr)	16	16
Recovery Tank Volume (Ltr)	19	19
Weight (kg)	36	58

TECHNICAL DATA	EC-30B	EC-30E	EC-40E	EC-40BT
No. of Brush	1 (disc)	1 (disc)	1 (disc)	1 (disc)
Maximum Speed (Km/Hr)	3.5	3.5	3.5	4.5
Supply (Volt/Hz)	230 (50Hz)	24V (2x12V)	220-240V (50Hz)	220-240V (50Hz)
Suction Width (mm)	550	550	815	815
Productivity (M2/H)	1670	1670	1750	2250
Scrubbing Width (mm)	450	450	500	500
Container Tank (Ltr)	28	28	40	40
Recovery Tank Volume (Ltr)	30	30	50	50
Weight (kg)	38	138	83	95





## Scrubber Driers Rider-On



TECHNICAL DATA	EC-80 BT 70	EC-80 BT 55
No. of Brush	2 (Cyl)	1 (Cyl)
Maximum Speed (Km/Hr)	6	6
Supply (Volt/Hz)	24V (4*6V)	24V (12x2)
Suction Width (mm)	942	710
Productivity (M2/H)	4200	3300
Scrubbing Width (mm)	700	550
Container Tank (Ltr)	80	80
Recovery Tank Volume (Ltr)	83	83
Weight (kg)	145	118

TECHNICAL DATA	EC-110 BT 70	EC-110 BT 85
No. of Brush	2 (Disc)	2 (Disc)
Maximum Speed (Km/Hr)	6.5	6.5
Supply (Volt/Hz)	24V	24V
Suction Width (mm)	940	1010
Productivity (M2/H)	4550	5525
Scrubbing Width (mm)	700	850
Container Tank (Ltr)	110	110
Recovery Tank Volume (Ltr)	115	115
Weight (kg)	214	213



TECHNICAL DATA	EC-230 BT 100
No. of Brush	2 (Cyl)
Maximum Speed (Km/Hr)	9
Supply (Volt/Hz)	36V
Suction Width (mm)	1280
Productivity (M2/H)	7875
Scrubbing Width (mm)	1050
Container Tank (Ltr)	205
Recovery Tank Volume (Ltr)	225
Weight (kg)	382



## Manual Car Washing Setup

### • High Pressure Washer



Wall Hanging High Pressure Washer



Trolley Based High Pressure Washer

3HP	3HP	5HP	7.5HP
SP	TP	TP	TP
12/140	12/140	12/170	15/200

### • Vacuum Cleaner



VC-15WD



VC-30WD



VC-70WD



VC-80WD

### • Dry-cleaner



ET-27UC



ET-30UC



ET-40UC

### • Under Body Wash



L Shape Underbody Lance  
"Manual Underbody Wash"



4 Nozzle Underbody  
"Manual Underbody Wash"



Rotating Underbody Lance  
"Manual Underbody Wash"



Robotic Underbody  
"Automatic Underbody Wash"



Scissor Lift

### • Consumable item



Micro Fiber Clothe



Glass Micro fiber  
Cloth



Wash Mitt



Car Polisher



Car Perfumes



Colored Foam



Upholstery Chemical



Jet wash Wax



Multi Purpose Polish





## Automatic Car Washing Setup

### Automatic Plant



• Jet Wash



• Jet wash with Dryer



• Brush Wash

### • High Pressure Washer



Wall Hanging High Pressure Washer



Hose Pipe



Lance



Foam Gun with Quick Connect



Foam Lance

### • Air Compressor (3HP)



### • Vacuum Cleaner



VC-70WD

### • Under Body Wash



Robotic Underbody  
"Automatic Underbody Wash"

### • Dry-cleaner



ET-40UC

### • Consumable item



Micro Fiber Clothe



Glass Micro fiber Cloth



Wash Mitt



Car Polisher



Car Perfumes



Colored Foam



Upholstery Chemical



Jet wash Wax



Multi Purpose Polish



## CONSUMABLES



Colored Foam



Jet wash Wax



Upholstery Chemical



Multi Purpose Polish



Micro Fiber Clothes



Glass Micro fiber Cloth



Wash Mitt



Steam Gloves



Car Polisher



CAR POLISHING  
MACHINE



Car Perfumes



(SS Body)



(MS Body)





UDOR was founded in 1996, today it develops, manufactures, markets, supplies and services diaphragm pumps and plunger pumps for pumping water, including chemical-added water. Pumps are developed to be incorporated into various kinds of pumping systems such as: Agricultural Sprayers, High Pressure Washers, Water Cleaners, Fire Fighting Systems, Deicing Equipment, Reverse Osmosis systems, Misting equipment, Lawn Care Sprayers and others.

UDOR complies with the requirements of ISO-9001 and we are committed to continuous improvement of the performance of all company departments and functions. We strongly believe in conduction business with ethics and in listening to customer needs.



TECOMEC was established in 1985, a new production and commercial company made its debut on the world market for forestry and gardening machinery. About thirty years later, the company has consolidated its success by distribution of more than 10.000 articles in 50 countries. The secret of this success lies in the company's philosophy, in the common spirit that moves all its staff and its production and commercial organization-a winning and innovative spirit. The company operates to the severest quality standards; its products are certified according to safety standards in force both in European Union and in the major extra EU countries



The Mecline division is the result of a merger between Meccanica Veneta and Arrow line companies with established experience in the high-pressure washing and car wash accessories. Mecline represents a product line that can meet the highly diverse demands of the market and covers its entire held, which ranges from the highly advanced professional segment to the semi-professional sphere. The Mecline organization has the means and the resources for designing and building products that are personalized to suit the individual customer.



Alberti International is one of the most popular Italian Manufacturers of High Pressure Washers, starting its activity in the 1977. Our base is located in the heart of the production district in the North of Italy: our total surface is 7000 square meters of land of which 3700 covered buildings. Beside the longevity and the importance of our structure, we distinguish ourselves as one of the few companies in this field able to produce the great part of the components inside of our factory. The Art of the real manufacturer comes from the ancient past and the experience grows through the tradition: Alberti International is mixing this art together with the modern technology, in order to create an innovative and resistant Italian product, famous all over the world.



## EZYTEK Presence in ASIA







**QUALITY ASSURED • COMPETITIVE PRICING**

Sales Enquiry : [sales@ezytekclean.com](mailto:sales@ezytekclean.com) | +91-9205989865

Service Enquiry : [service@ezytekclean.com](mailto:service@ezytekclean.com) | +91- 9205989864

Call for All your sales/Service Queries between 9.30am to 6.30pm in all working days.

Call Us On :

**+91-9891047218**

E-mail

[Info@ezytekclean.com](mailto:Info@ezytekclean.com)

We 'll do everything to resolve your issues immediately.



**EZYTEK CLEAN PVT. LTD.**


Corporate Office : G-83, Site V, Kaska, Greater Noida, UP - 201310



**Government Sector**



Follow Us On :

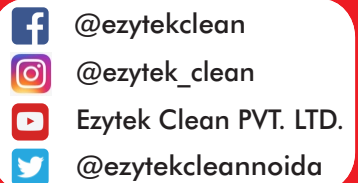

Landline : 0120 - 297 - 8727

Mob. : +91-9205989865 | +91-9821491403

E-mail : [sales@ezytekclean.com](mailto:sales@ezytekclean.com) | [sales1@ezytekclean.com](mailto:sales1@ezytekclean.com)

Website : [www.ezytekclean.com](http://www.ezytekclean.com) | [www.ezytekclean.co.in](http://www.ezytekclean.co.in) | [www.ezytekclean.in](http://www.ezytekclean.in)



Vacuum Cleaner



Upholstery Cleaner



Trolley Based

High Pressure Washer



Wall Mount

High Pressure Washer



Electric steam Cleaner




Diesel Steam Cleaner



Automatic Touchless

Car Wash With Dryer

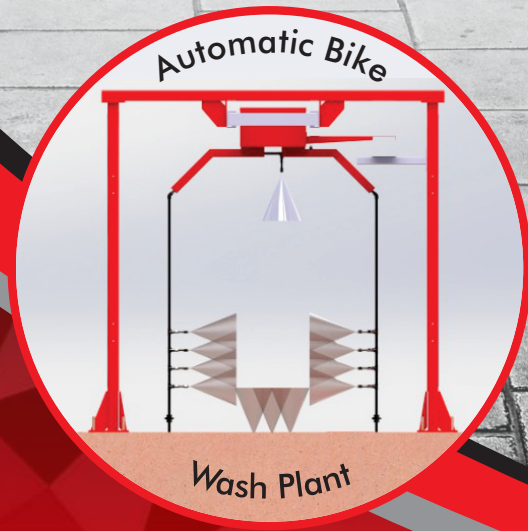

Automatic Bike

Wash Plant



Automatic Bike Wash Plant

### EZYTEK CLEAN PVT. LTD.

Corporate Office : G-83, Site V, Kasna, Greater Noida, UP - 201310  
Ph.: 91-120-297-8727 | +91-9205989865 | +91-9821491403  
E-mail : sales@ezytekclean.com | sales1@ezytekclean.com  
Website : www.ezytekclean.com | www.ezytekclean.co.in

Dealer :



© Copyright © 2023 EZYTEK CLEAN PVT. LTD.  
All rights reserved





## Single Post Lift

### Product Description:

We manufacture Single Post Washing Lift with high quality raw materials and accuracy for a trouble free performance. The capacity of this lift is 4 ton

SPECIFICATION	ET-4SP
Capacity	4 tons
Number Of Post	1
Body Material	Mild Steel
Piston Coating	Double Chrome Coating
Type	One Cylinder Hydraulic Lift
Brand	EZYTEK CLEAN
Lifting Height	1500 mm
Ramp Length	4500 mm
Plunger Diameter	270 mm
Oil Filing Capacity	150 Ltr
Number Of Vehicles	one
Lifting Time	15 sec
Guider Platform	Provided
Operating Pressure	9 to12 KG / cm <sup>2</sup>

